Commercial brochure



/ Milan 42 / 60

Extra crossbar for extra comfort

Verhofsté
shaping open spaces

/ GENERAL

This sturdy U-rack with rounded corners is ideal for storing and attaching two bicycles. The crossbar makes this U-rack also suitable for parking children's and women's bicycles.









Verhofsté group
Baaikensstraat 9
9240 Zele

sales@verhofste.com
www.verhofste.com

/shaping
open
spaces/

/ DATASHEET

Structure

- Bended tube (Dxd = 42x3mm or 60x3mm)
- 2 base plates (Dxd = 150x5mm or 200x5mm)
- Extension for concreting

Material

- Steel

Versions

- D=42mm
- D=60mm
- On base plates
- To concrete

Connecting options

- Yes

Surface treatment

- Hot-dip galvanized steel
- Hot-dip galvanized and powder coated steel

Dimensions

Base plates


- LxDxH = 1000x42x800mm (Dxd = 150x5mm)
- LxDxH = 1000x42x800mm (Dxd = 200x5mm)
- LxDxH = 1200x42x900mm (Dxd = 150x5mm)
- LxDxH = 1000x60x800mm (Dxd = 150x5mm)
- LxDxH = 1000x60x800mm (Dxd = 200x8mm)


Concreting


- LxDxH = 800x42x (800 + 270) mm
- LxDxH = 1000x42x (800 + 270) mm
- LxDxH = 1000x60x (800 + 300) mm


Anchoring


- Concreting
- Base plates
  - Directly on the pavement by means of wedge bolts
  - With screws and plugs on 2 concrete blocks 30x30x40cm
  - By chemical anchoring

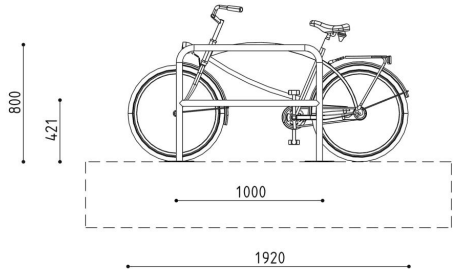






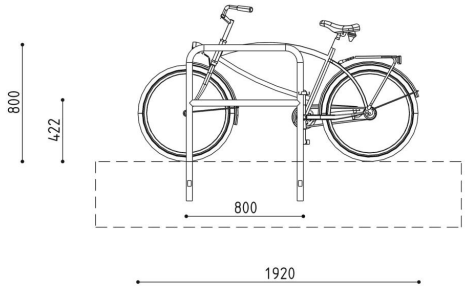





Verhofsté group
Baaikensstraat 9
9240 Zele

sales@verhofste.com
www.verhofste.com

/shaping open spaces/

/ INSPIRE









Verhofsté group
Baaikensstraat 9
9240 Zele

sales@verhofste.com
www.verhofste.com